

DATA SHEET SWISSCAVE WL30F

Technical Data

Exterior

Casing	Black coated steel
Door glazing	Fully glazed UV-resistant, gas-filled, with low energy panes equipped glass door (double glazed)
Door frame	Aluminium matt black
Door handle	Anodised, brushed aluminium (optionally available)
Door lock	
Door hinge	Right
Door hinge convertible as option (right to left)	Yes
Product dimensions without door handle (H/W/D)	820 x 150 x 525 mm
Packaging dimensions (H/W/D)	845 x 185 x 580 mm

Interior

Temperature zones	1
Lighting	Blue ceiling lighting
Lighting on/off switch	Yes
Number of shelves total	0

Shelf material

Telescopic shelves on extendable steel ball bearings

Inside casing	Black PUR
---------------	-----------

Scope of functions

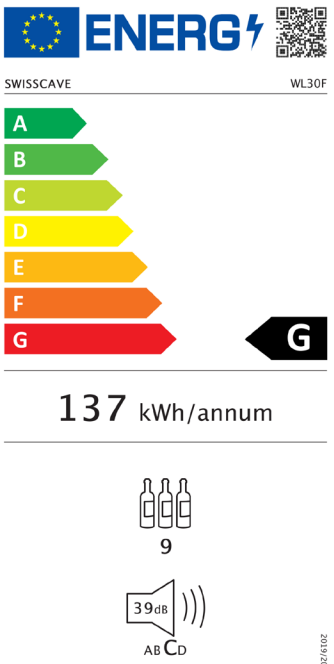
Optimal usage	Long-term storage and aging
User interface	Celsius/Fahrenheit switch
Active carbon filters (ensuring optimal air quality)	Yes
Compressor	JP-STD
Coolant	R600a (environment friendly)
Vibrationfree implementation	Yes
Cooling system	Combined fan and convection cooling
Temperatur Memory Function (Power failure)	Yes
Condensation water container	Yes
Heating	
Acoustic temperature alarm	Yes
Acoustic door alarm	Yes
Feet adjustable to compensate uneven floors	Yes

Performance data

Humidity	Recommendation 50-70%
Actively managed humidity (adjustment range 60-80%)	
Climate classification	SN-T
Volume	22 l
Noise level	39 dB(A) sound-absorbing recommendation
Temperature range	5 °C - 20 °C

General Information

Cooler shape	Free-standing or embeddable with shadow gap
Maintenance contract (warranty extension)	Recommended
Transport weight	22 kg
Net weight	20 kg
Power consumption per day	0,375 kWh (ca.)
Voltage	220 V / 50 Hz
Cable length	2 m

ENERGY

SWISSCAVE WL30F

A
B
C
D
E
F
G

137 kWh/annum

9

39dB

ABCD

8102/6702